


VSSA-6-6-C
VSSA-6-9-C
VSSA-6-13-C
VSSA-6-16-C
VSSAM-6-6-C
VSSAM-6-9-C
VSSAM-6-13-C
VSSAM-6-16-C

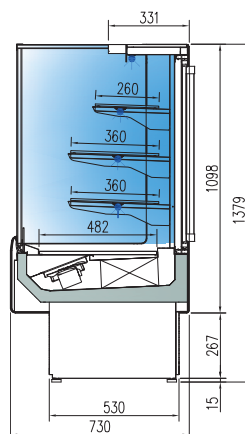

VSSA-6-6-R
VSSA-6-9-R
VSSA-6-13-R
VSSA-6-16-R
VSSAM-6-6-R
VSSAM-6-9-R
VSSAM-6-13-R
VSSAM-6-16-R

mod.	rango range	largo length (mm)	fondo depth (mm)	alto height (mm)	exposición display TDA (m²)	puertas corredera sliding doors (uds)	puertas abatibles hinged doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
VSSAM-6-6	+2°C+8°C	600	730	1380	0,6	-	-	817	1367	R449A
VSSAM-6-9	+2°C+8°C	950	730	1380	1	-	-	1315	1704	R449A
VSSAM-6-13	+2°C+8°C	1300	730	1380	1,4	-	-	1497	2003	R449A
VSSAM-6-16	+2°C+8°C	1650	730	1380	1,8	-	-	1755	2121	R449A
VSSA-6-6	+2°C+8°C	600	730	1380	0,6	0	1	817	1367	R449A
VSSA-6-9	+2°C+8°C	950	730	1380	1	2	0	1315	1704	R449A
VSSA-6-13	+2°C+8°C	1300	730	1380	1,4	2	0	1497	2003	R449A
VSSA-6-18	+2°C+8°C	1650	730	1380	1,8	2	0	1755	2121	R449A

Características técnicas y constructivas sujetas a variación sin previo aviso

VSSA vitrina refrigerada autoservicio puertas traseras

VSSAM vitrina refrigerada autoservicio

- Exterior fabricado en chapa de acero plastificada, lacada o inox
- Costados en ABS inyectado
- Interior en acero inoxidable AISI-304 18/10.
- **Cristal doble templado:** laterales y puertas
- Perfilera en aluminio anodizado
- Estantes de cristal, con iluminación LED 6500 K
- Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado
- Descarche automático con evaporación automática
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Clase climática 3 (25°C 60%) régimen M1

Todos los modelos se pueden personalizar en decoración
Cualquier decoración incluida en el precio, excepto alto brillo y metalizados

We reserve the right to change specifications without prior notice

VSSA snacks refrigerated selfservice, rear side doors

VSSAM snacks refrigerated selfservice

- External finish in plastic coated steel, lacquered or stainless steel
- Sides in ABS injected
- Internal finish in AISI-304 18/10 stainless steel
- **Tempered double glazed:** sides and doors
- Anodised aluminium profiles
- Glass shelves, with 6500 K LED lighting
- Optional 3000 K LED (soft light) or PINK, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator
- Auto defrost and automatic evaporation
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Climate class 3 (25°C 60%) regime M1

All models can be customized in decoration

All decorations are included on price, except glossy or melic finishing

230v 60Hz / 115v 60Hz consultar - consult



Disponible acabados de la carta NCS o RAL, incluidos en el precio estándar, excepto alto brillo y metalizados.

Available finish included in NCS or RAL color chart, at the same price, except glossy and metallic finishing





VSSA-6-13-R



VSSAM-6-16-C