Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CUD-22G/M 230V 1N 50Hz

19089470 23/03/2022

DENOMINATION:

Mixed refrigeration and freezer cabinet - Concept with 2 compartments and 2 doors, at 50Hz.

DESCRIPTION :

- Structure built with AISI-304 stainless steel.
- 60 mm, 40 kg/m3 injected polyurethane insulation.
- Embedded inner tray slides. Storage trays at 23 different levels 55 mm from each other.
- Forced draught cooling system with hermetically sealed compressor.
- Copper piping and aluminium flaps evaporator.
- Digital display for electronic and digital control of temperature and defrosting.
- Opened door delay alarm.
- Self-closing and stay open doors. When opened less than 90º they close by themselves. When opened more than 135º they stay open.
- Built-in drainage to get rid of waste liquids inside the unit.
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- Working temperature: from 0 ºC to +8 ºC (refrigerators) and from -18 ºC to -22 ºC (freezers).
- Tested in climatic class 4..
- Inner LED lights with power switch (in refrigerated cabinets and now also in freezing units).

Mixed refrigeration and freezer cabinet.
Two independent modules with their respective refrigeration units and electronic controls.
Refrigeration module:
- Forced draught refrigeration.
- Operational temperature: 0 °C, +8 °C

Freezer module:
- Forced draught evaporator.
- Operational temperature: -18 °C, -22 °C.

POSSIBLE OPTIONS :

- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Locks
- Pedal

POSSIBLE ACCESSORIES :

- REFRIGERATION
- ACCESSORIES
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 12037958 GN-2/1 GRID made in Epoxi (650x530) 6

DIMENSIONS



X Width	1318 mm	X Gross width	1430 mm
Y Depth	842 mm	Y Gross depth	880 mm
Z Height	2040 mm	Z Gross height	2063 mm
Net Weight	302,0 kg	Gross Weight	320,0 kg
Net volume	2,264 m3	Gross volume	2,596 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	4,4 A
Electric frequency	50Hz
Electric power	0,654 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Climate class	4
Cooling gas load	98,000 g
Gross internal volume	1220 L
Refrigeration power	0,361 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Condensation system	Vent.
Number of doors	2

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CUD-22G/M 230V 1N 50Hz
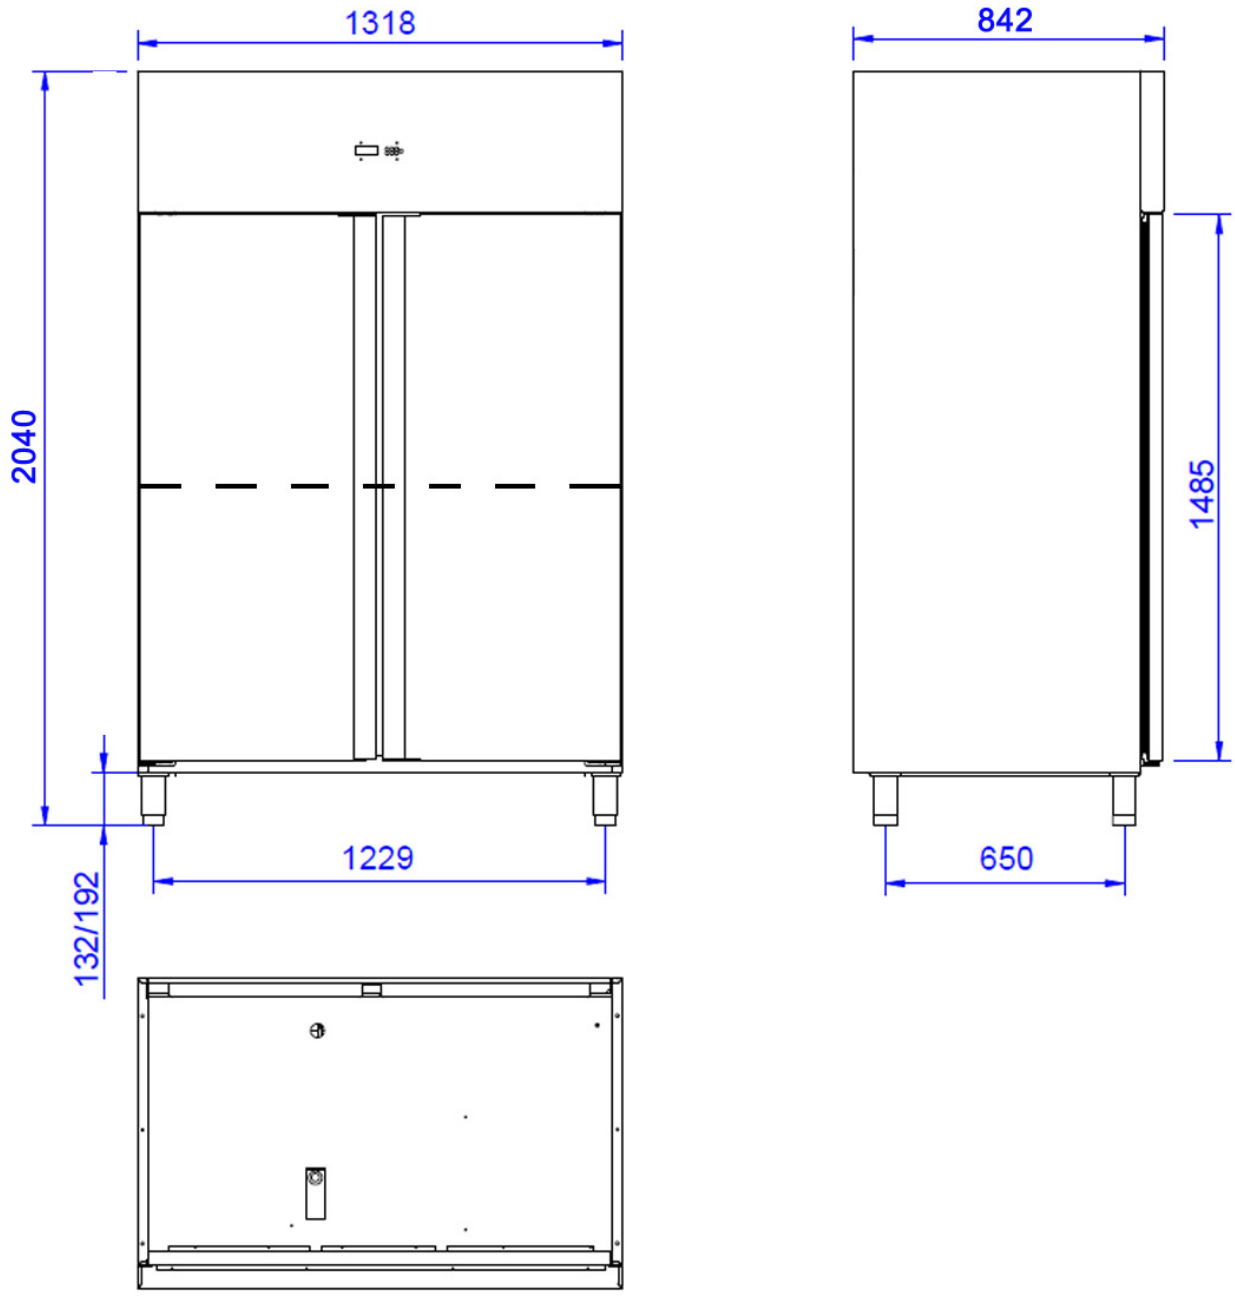
19089470 23/03/2022