Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CUP-22G 230V 1N 50Hz

19089448 23/03/2022

DENOMINATION:

Refrigerated cabinet - Concept Gastronorm with 2 compartments and 2 door, at 50Hz.

DESCRIPTION :

- Structure built with AISI-304 stainless steel.
- 60 mm, 40 kg/m3 injected polyurethane insulation.
- Embedded inner tray slides. Storage trays at 23 different levels 55 mm from each other.
- Forced draught cooling system with hermetically sealed compressor.
- Copper piping and aluminium flaps evaporator.
- Digital display for electronic and digital control of temperature and defrosting.
- Opened door delay alarm.
- Self-closing and stay open doors. When opened less than 90º they close by themselves. When opened more than 135º they stay open.
- Built-in drainage to get rid of waste liquids inside the unit.
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- Working temperature: from 0 ºC to +8 ºC (refrigerators) and from -18 ºC to -22 ºC (freezers).
- Tested in climatic class 4..
- Inner LED lights with power switch (in refrigerated cabinets and now also in freezing units).

Refrigerated cabinet

POSSIBLE OPTIONS :

- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Glass door
- Locks
- Pedal
- Remote group

POSSIBLE ACCESSORIES :

- REFRIGERATION
- ACCESSORIES
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 12037936 Guide for grill GN-1/1 - wall - 562 mm - 1 piece 6
- 12037958 GN-2/1 GRID made in Epoxi (650x530) 6

DIMENSIONS



X Width	1318 mm	X Gross width	1430 mm
Y Depth	842 mm	Y Gross depth	880 mm
Z Height	2040 mm	Z Gross height	2063 mm
Net Weight	227,0 kg	Gross Weight	240,0 kg
Net volume	2,264 m3	Gross volume	2,596 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	0,84 A
Electric frequency	50Hz
Electric power	0,206 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Annual elec. consumption	913,00 kWh
Clasif. Energy efficiency	C
Climate class	4
Cooling gas load	100,000 g
Energy Efficiency Index	45,17 %
Gross internal volume	1186 L
Model Type	Vertical cabinet
Power consumption 24h	2,50 kWh
Refrigeration net.vol	859 L
Refrigeration power	0,436 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Condensation system	Vent.
Number of doors	2

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CUP-22G 230V 1N 50Hz
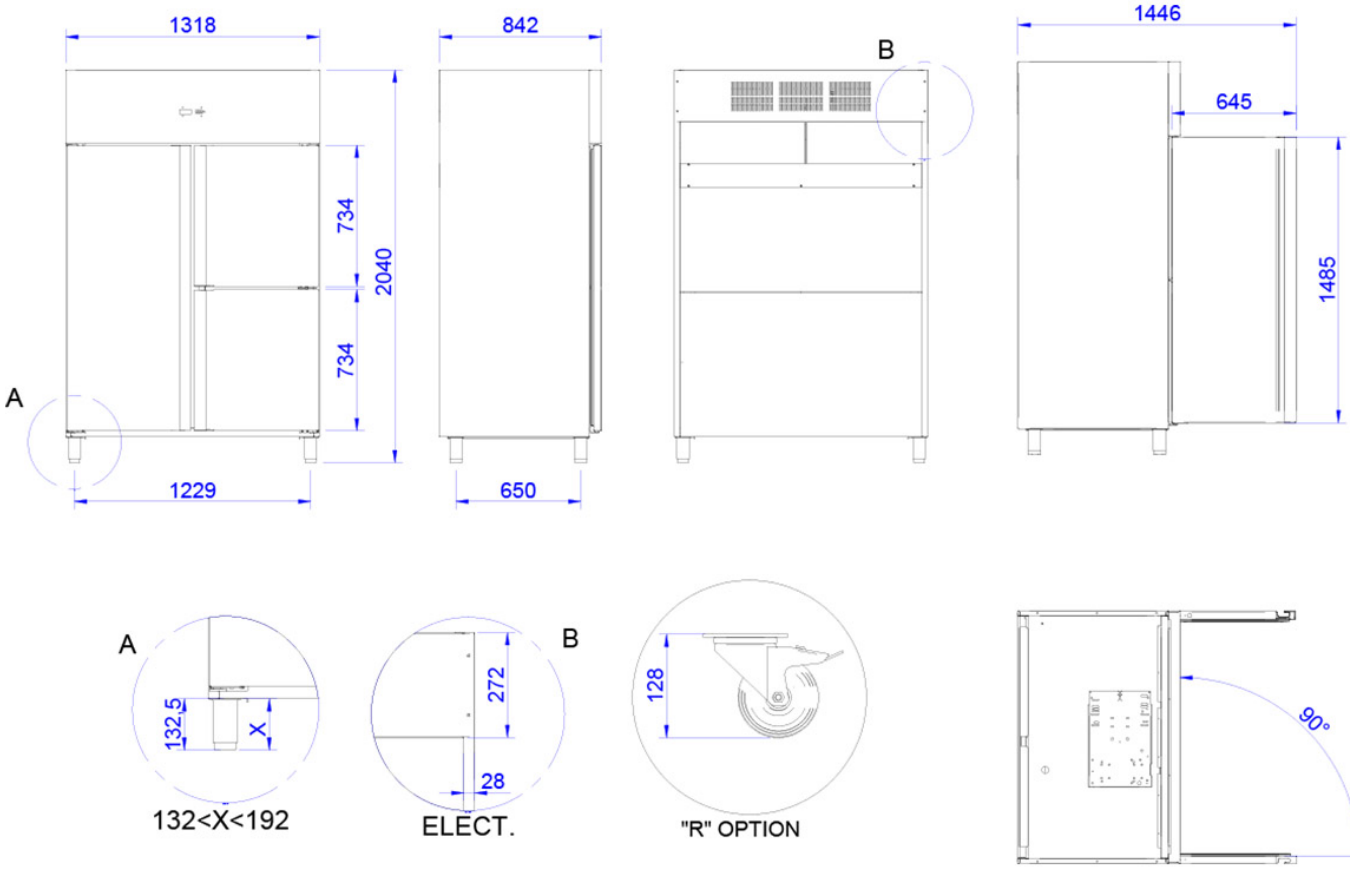
19089448 23/03/2022