


MFB-135

MFB-180

MFB-220

MFB-270

MFB-135 -C

MFB-180-C

MFB-220-C

MFB-270-C

MFB-135 -CC

MFB-180-CC

MFB-220-CC

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 1/1	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
MFB-135	-2°C +8°C	1345	600	700	2	2	169	230V-50Hz	R134a*	178	207	C	5 40°C 40%
									R290	502	218	B	5 40°C 40%
MFB-180	-2°C +8°C	1795	600	700	3	3	264	230V-50Hz	R134a*	245	253	D	5 40°C 40%
									R290	502	218	B	5 40°C 40%
MFB-220	-2°C +8°C	2220	600	700	4	4	359	230V-50Hz	R134a*	304	293	D	5 40°C 40%
									R290	502	239	C	5 40°C 40%
MFB-270	-2°C +8°C	2695	600	700	5	5	454	230V-50Hz	R134a*	304	293	D	5 40°C 40%
									R290	502	239	C	5 40°C 40%
MFB-135-C	-2°C +8°C	1345	600	700	1	1	169	230V-50Hz	R134a*	178	211	C	5 40°C 40%
									R290	502	218	B	5 40°C 40%
MFB-180-C	-2°C +8°C	1795	600	700	1	1	264	230V-50Hz	R134a*	245	253	D	5 40°C 40%
									R290	502	218	C	5 40°C 40%
MFB-220-C	-2°C +8°C	2220	600	700	1	1	359	230V-50Hz	R134a*	304	293	D	5 40°C 40%
									R290	502	410	D	5 40°C 40%
MFB-135-CC	-2°C +8°C	1345	600	700	0	0	169	230V-50Hz	R134a*	304	314	E	5 40°C 40%
									R290	502	277	D	5 40°C 40%
MFB-180-CC	-2°C +8°C	1795	600	700	0	0	264	230V-50Hz	R134a*	485	503	E	5 40°C 40%
									R290	1004	615	E	5 40°C 40%
MFB-220-CC	-2°C +8°C	2220	600	700	0	0	359	230V-50Hz	R134a*	485	503	E	5 40°C 40%
									R290	1004	615	E	5 40°C 40%

*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

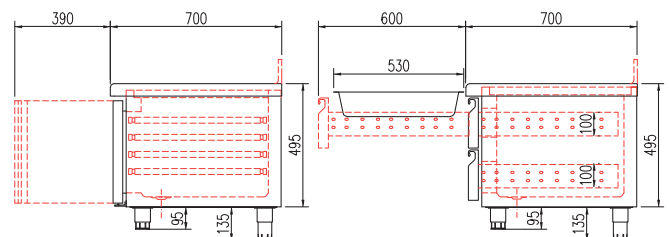
- **MFB** dotación de puertas
- **MFB-C** dotación de cajoneras dobles + una puerta
- **MFB-CC** dotación de cajoneras dobles + evaporadores centrales
- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cajoneras refrigeradas inox desmontables sobre guías inox telescópicas, sistema autocierre de serie
- Encimera de acero inox AISI-304 con frente curvo (opcional con peto sanitario 100 mm)
- Estantes interiores GN 1/1 de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 95 - 135 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Condiciones de trabajo a 40°C ambiente

OPCIONES

OPCIONES	OPTIONS
parrilla adicional GN 1/1	GN 1/1 extra shelf
set adicional guías GN 1/1	GN 1/1 slides extra set
cambio R290 por R134a	R290 to R134a
cerradura puerta inox	solid door lock
motor lado izquierdo	left side engine
encimera con peto	worktop with upstand
set 4 ruedas	4 castors set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

We reserve the right to change specifications without prior notice.

- **MFB doors as standard**
- **MFB-C double drawers sets + one dor as standard**
- **MFB-CC double drawers sets + evaporators between drawers**
- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Stainless steel drawers with telescopic stainless steel slides for complete opening, soft-closing system as standard
- AISI-304 stainless steel worktop, with rounded front (optional with 100 mm sanitary upstand)
- GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 95 to 135 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating 40°C ambient


MFB
MFB-C